

12-1-2016

Section: Earth science

GAS SAND DETECTION USING ROCK PHYSICS AND PRE-STACK SEISMIC INVERSION, EXAMPLE FROM OFFSHORE NILE DELTA, EGYPT

Hamed El-Mowafy

Department of Geology, Al-Azhar University, Cairo, Egypt

Follow this and additional works at: <https://absb.researchcommons.org/journal>



Part of the [Life Sciences Commons](#)

How to Cite This Article

El-Mowafy, Hamed (2016) "GAS SAND DETECTION USING ROCK PHYSICS AND PRE-STACK SEISMIC INVERSION, EXAMPLE FROM OFFSHORE NILE DELTA, EGYPT," *Al-Azhar Bulletin of Science*: Vol. 27: Iss. 2, Article 3.

DOI: <https://doi.org/10.21608/absb.2016.42881>

This Original Article is brought to you for free and open access by Al-Azhar Bulletin of Science. It has been accepted for inclusion in Al-Azhar Bulletin of Science by an authorized editor of Al-Azhar Bulletin of Science. For more information, please contact kh_Mekheimer@azhar.edu.eg.

GAS SAND DETECTION USING ROCK PHYSICS AND PRE-STACK SEISMIC INVERSION, EXAMPLE FROM OFFSHORE NILE DELTA, EGYPT

Hamed Z. El-Mowafy

Department of Geology, Al-Azhar University, Cairo, Egypt

ABSTRACT

Well logs and three-dimensional (3-D) partial angle stacks and full angle stack seismic volumes are used in this study with the purpose of detecting gas sands using rock physics and pre-stack inversion workflows. Integration of pre-stack inversion and rock physics analysis can improve the characterization of the late Pliocene gas sandstone reservoir, offshore Nile Delta. The inversion was performed using a deterministic wavelet set. Rock physics was used to enhance the VP, VS, and density volumes from the inversion. The present study performed in three phases: AVO analysis, pre-stack inversion, and lambda-mu-rho (LMR) analysis. The results from the different crossplots, such as P-Impedance vs. Vp/Vs, show that the gas sands are clearly separated from brine sands and shale. By maximizing the potential offered from the elastic properties such as $\lambda\rho$, $\mu\rho$ and Vp/Vs ratio we were able to define the limits and cutoffs which sufficiently separate the gas sand bodies. The resulted volumes were used to better define the late Pliocene reservoir and optimize a new well location. The pre-stack inversion and AVO/rock physics studies resulted in a new Gas Initial In Place (GIIP) calculation that was doubled in the P50 case from the original estimation based only on the seismic amplitude data. The chance of success was increased and a new well is proposed to drain the gas in the eastern flank of Channel 1.

INTRODUCTION

The Nile Delta Basin covers an extensive area including onshore, shelf and deepwater environments. The Nile Delta offshore is rapidly emerging as a major gas province. High-quality three-dimensional (3-D) seismic data, coupled with data from thirteen consecutive successful deep-water exploration and appraisal wells, have highlighted clear phases of erosion and deposition within the upper Pliocene deep-marine slope channels (Samuel et al., 2003). Scarab field is part of the offshore Nile Delta and lies in West Delta Deep Marine (WDDM) concession, 50–100 km offshore in the deep water of the present-day Nile Delta (Figure 1). A series of successive exploration and appraisal wells drilled by BG Egypt and Rashpetco encountered gas-bearing sands in slope canyon settings on the concession (Figure 2). The Scarab field is submarine delta slope canyon system, with complex turbiditic channel-levee reservoirs. They record delta front submarine flows, mass wastage and related slope processes on the proto-Nile Delta. Detailed studies of the geometry of the canyon systems, from seismic extractions, core data, wireline logs and high-

resolution FMI imaging (Samuel et al., 2003) reveal a complex canyon fill.

The basic building blocks of the canyons are regional incision surfaces that can be mapped from the seismic. These define the cutting of the canyons, and the canyon geometry. Canyons are not channels themselves but are filled with a complex sequence of turbiditic deposits which include thalweg channel deposits, transgressive sandstones, slumps, crevasse splays and various overbank deposits. The key elements of a canyon fill are summarized in Figure 3. The term channel is reserved to describe specific confined sand-dominated elements within each of the canyon complexes. Scarab field consists of two stacked channels that were discovered in 1998 and came on production at the end of March 2003.

The available data for this study are sorted into well logs and seismic data. The available well logs are gamma ray (GR), deep resistivity (RD), P-wave velocity (Vp), S-wave velocity (Vs), and density (ρ) logs for seven wells. Other attributes as $\lambda\rho$ were calculated from the original logs. The available seismic volumes are partial angle stacks of near (0°- 15°), mid (15°- 30°) and far (30°- 45°). In addition to full angle stack seismic volume.

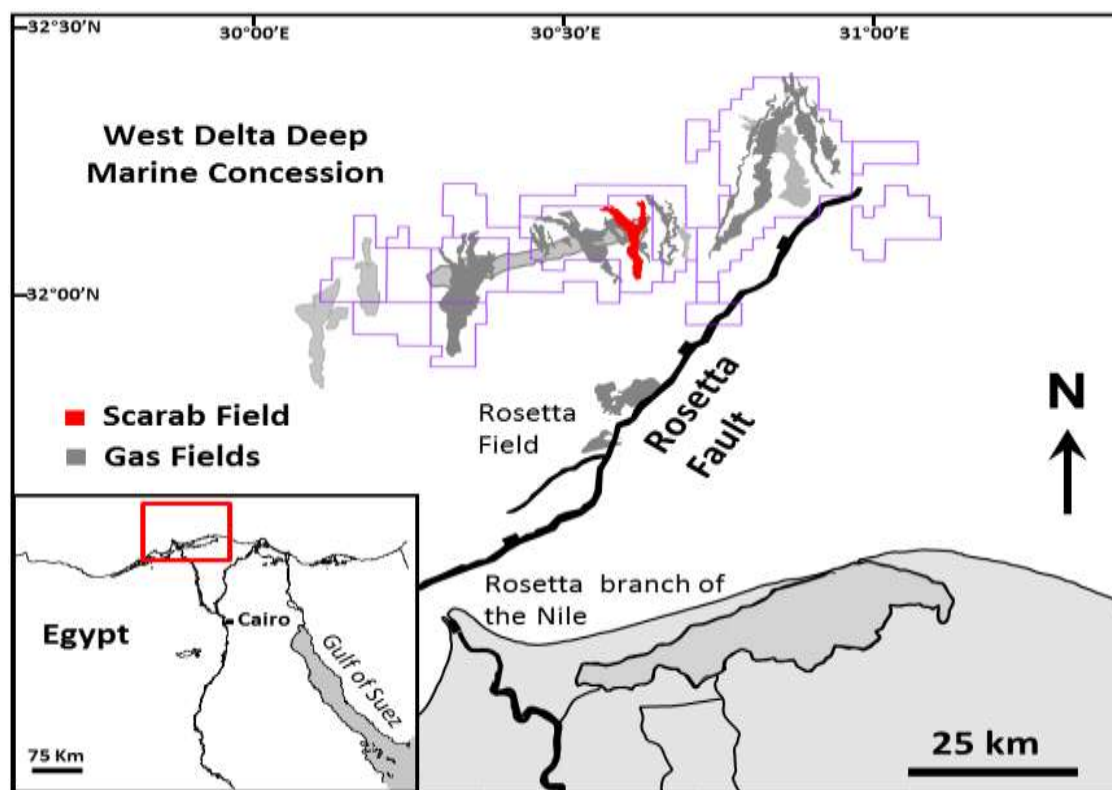


Figure 1: Location map of the western Nile Delta and study area (red box). Upper Pliocene gas fields are in grey and Scarab field is in red modified from Samuel et al., 2003.

The study has three phases; AVO analysis, pre-stack inversion, and lambda-mu-rho (LMR) analysis. The resulted volumes were used to better define the reservoir and optimize the new well location.

The AVO response can be tested by plotting the reflection coefficients versus offset and crossplot the slope and intercepts of the curve. The classification of AVO response should be based on the position of the reflection of interest on an A (intercept) versus B (gradient) crossplot. This can be done using well control and amplitude-calibrated seismic data. Figure 4a depicts a color scheme used to classify seismic anomalies based on Rutherford and Williams' (1989) classification. The polarity convention in this display denotes a decrease in acoustic impedance by a peak.

Using this color scheme, four zones of AVO response were outlined on the AB crossplot shown in Figure 4a with top-gas points plotted in upper right corner and bottom gas points plotted in lower left corner. These responses were mapped back to the seismic

section where they neatly picked out the top and bottom reflectors from the gas sands (Figure 4b). Using top of the reservoir, Figure 4c shows an amplitude extraction from the AVO classification scheme map to show the AVO response in a 3D manner. Plio-Pleistocene gas sands are usually Class III sands (Rutherford and Williams 1989).

Pre-Stack Inversion

Using the partial angle stacks of near (0° - 15°), mid (15° - 30°) and far (30° - 45°) with proper deterministic wavelets, the pre-stack inversion estimates P-impedance (Z_p) and S-impedance (Z_s). Simultaneously with these volumes, V_p , V_s and V_p/V_s volumes were computed as well as the Lamé parameter volumes of lambda-rho ($\lambda\rho$) and mu-rho ($\mu\rho$). It starts from an initial low-frequency model of P-wave velocity, S-wave velocity, and density. As the program iterates, it improves the fit between the recorded seismic traces and model-based synthetic traces by locally modifying the P-impedance model together with local deviations of the relationship between P-impedance, S-impedance, and density. Using

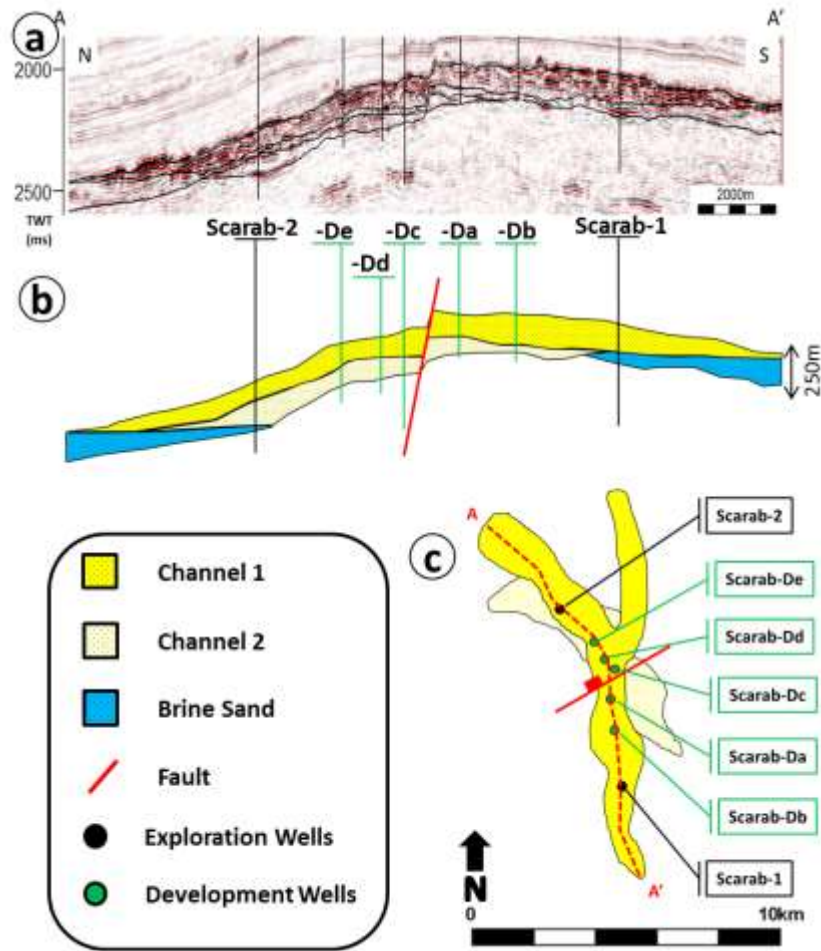


Figure 2: (a) An arbitrary seismic section through the channels, (b) a schematic section and (c) a map illustrating the Scarab field. The seismic data in this and the other seismic displays have a normal polarity with a soft kick (e.g., gas sand) a peak (black) and a hard kick (e.g., seabed and gas-water contacts) a trough (red).

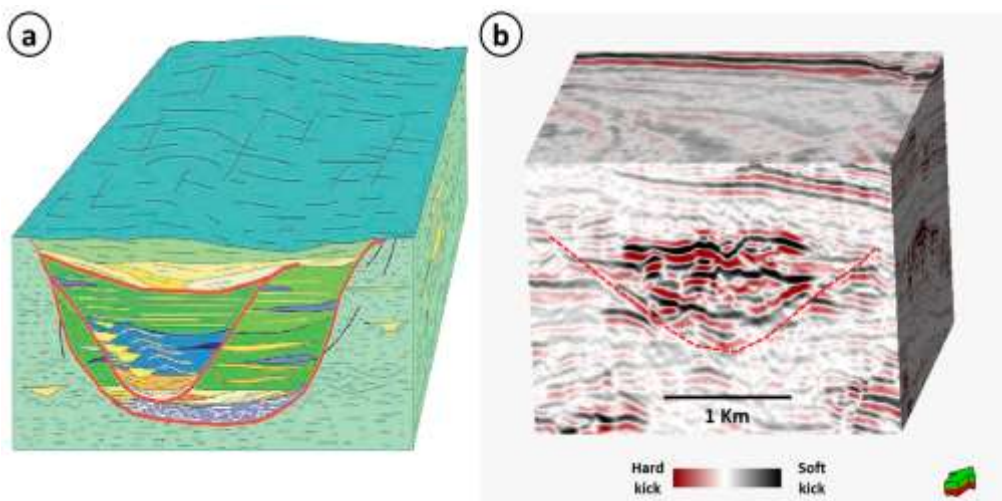


Figure 3: (a) Schematic block diagram of the depositional model for representative canyon complexes (from Samuel et al., 2003) and (b) actual seismic of Scarab field. Red lines represent canyon incision surfaces cutting through background slope deposits. Canyons are filled with a complex sequence of turbidite deposits that include sand-filled channels, channel levees, crevasse splay sands, overbank deposits, and slumps.

well-logs, a variety of crossplots were created to see which one separates the lithologies the most. The clustered points on the acoustic impedance (AI) versus Vp/Vs crossplot show a good separation among the gas sand, brine sand and shale lithologies. The same was done with the P-impedance and Vp/Vs volumes obtained

from the pre-stack inversion. The differentiation between gas sand, brine sand, and shale was performed with P-impedance vs. Vp/Vs crossplot. Figure 5 shows the gas sand detection in the crossplot, section, and map.

Assuming water saturation and volume of shale cut-offs equal to $S_w < 50\%$ and $V_{sh} < 40\%$,

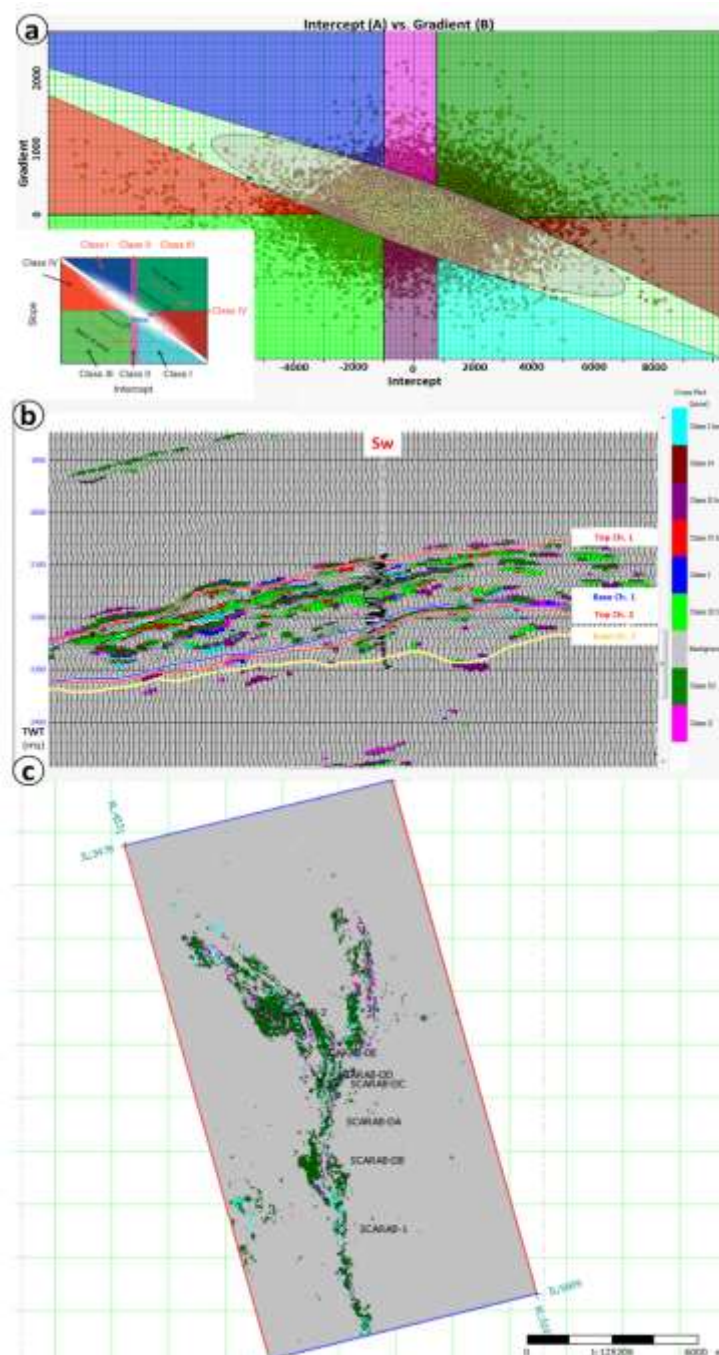


Figure 4: AVO intercept vs. gradient crossplot (a) for a single cross-line that passing through B well location (b). (c) Amplitude extraction from the AVO classification scheme over top Channel 1 reservoir. Note that the dominant color is the dark green which refers to class III gas sand.

respectively, we defined a V_p/V_s cut-off value (≈ 2.6) that separates gas-bearing sands from other lithologies. Subsequently, we can implement that cut-off on the V_p/V_s volume to detect gas-bearing sands.

Rock Physics Analysis

Following the work and recommendations

of Goodway et al. (1997) the crossplot $\lambda\rho - \mu\rho$ was analyzed further as λ is described as the most sensitive fluid indicator. The physical interpretation of the lambda (λ) and mu (μ) attributes is: The λ term, or incompressibility, is sensitive to pore fluid, whereas the μ term, or rigidity, is sensitive to the rock matrix. The Lamé parameters were obtained during the

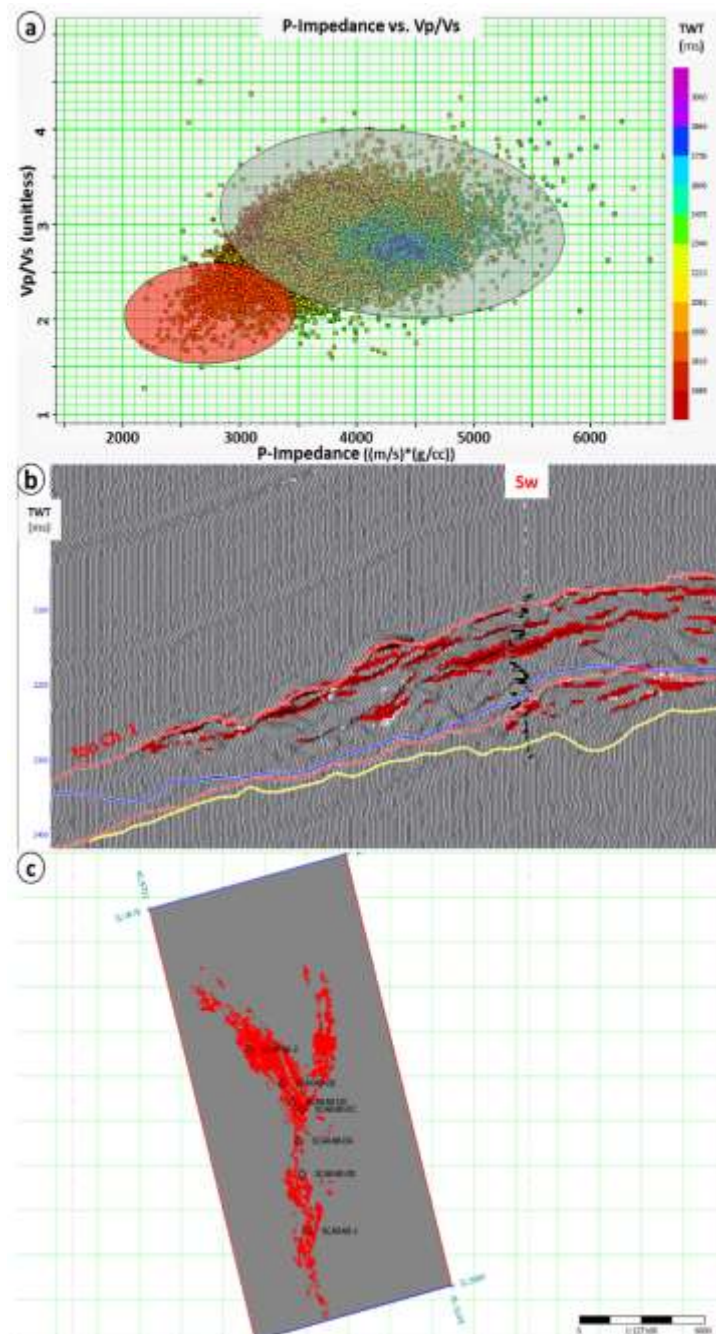


Figure 5: (a) P-impedance vs. V_p/V_s crossplot using the inversion results. (b) Seismic cross section displayed as wiggle traces highlighting gas sands. (c) Amplitude extraction from the crossplot over top of Channel 1 reservoir. The red color shows potential gas points while the grey color shows potential shale points

simultaneous inversion from Z_p and Z_s . In theory, we cannot decouple the effects of density from λ and so, the output will be lambda-rho ($\lambda\rho$) and mu-rho ($\mu\rho$) volumes and it is, therefore, most beneficial to crossplot $\lambda\rho$ versus $\mu\rho$ to minimize the effects of density. The $\lambda\rho$ - $\mu\rho$ crossplot can be used to define the gas sand with a $\lambda\rho$ cut-off ranging between 6 and 7 GPa.g/cc as shown in Figure 6a. This cut-

off (≈ 6.6 GPa.g/cc) was mapped back to the seismic section passing through Scarab-De well (Figure 6b). The map in Figure 6c shows the same results in a 3D manner. Note that the results from this analysis are consistent with the results obtained from the AVO analysis and those obtained from inversion shown in Figures 4 and 5, respectively.

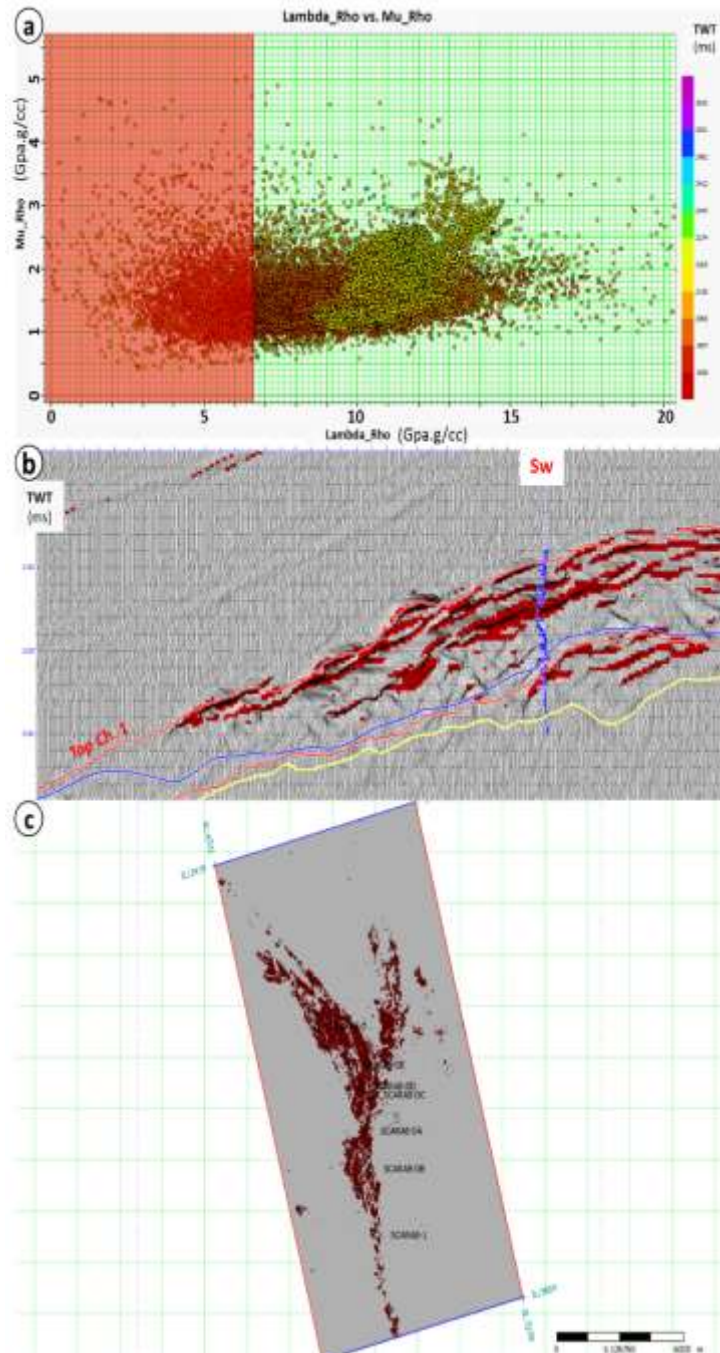


Figure 6: (a) Attribute crossplot for $\lambda\rho$ - $\mu\rho$. (b) Seismic cross section displayed as wiggle traces highlighting gas sands. (c) Amplitude extraction from the $\lambda\rho$ - $\mu\rho$ crossplot over top of Channel 1 reservoir. The dark red color represents gas sand. The points less than the $\lambda\rho$ cut-off of 6.6 GPa.g/cc

RESULTS

The results from the different crossplots show that the separation of gas sands is better defined than brine sands and shale. By maximizing the potential offered from the elastic properties such as $\lambda\rho$, $\mu\rho$ and V_p/V_s ratio we were able to define the limits and cutoffs which sufficiently separate the gas sand bodies. An accurate reservoir Gas Initial In Place (GIIP) estimation was required to history-match the early commissioning of the fields to ensure optimal production rates and ultimate gas reserves. Based only on the seismic amplitude data, the GIIP estimation was not exceeding 30 Billion Cubic Feet (BCF) which was not enough to drill a new well. After the pre-stack inversion and AVO/rock physics

studies, the new GIIP calculation was doubled in the P50 case. The chance of success was increased. A new well is now proposed to be drilled in the eastern flank to drain the gas (Figure 7).

CONCLUSIONS

AVO analysis was used in an attempt to distinguish different lithologies at the reservoir zone. The crossplots allow isolation and comparison of the AVO responses. AVO attribute slice at the top of Channel 1 reservoir shows the dominance of AVO class III which was expected in the Pliocene channelized gas sands. The P-impedance- V_p/V_s and $\lambda\rho$ - $\mu\rho$ crossplots separate different lithologies in particular: gas and shale. Both crossplots are used successfully to outline the gas sands. The

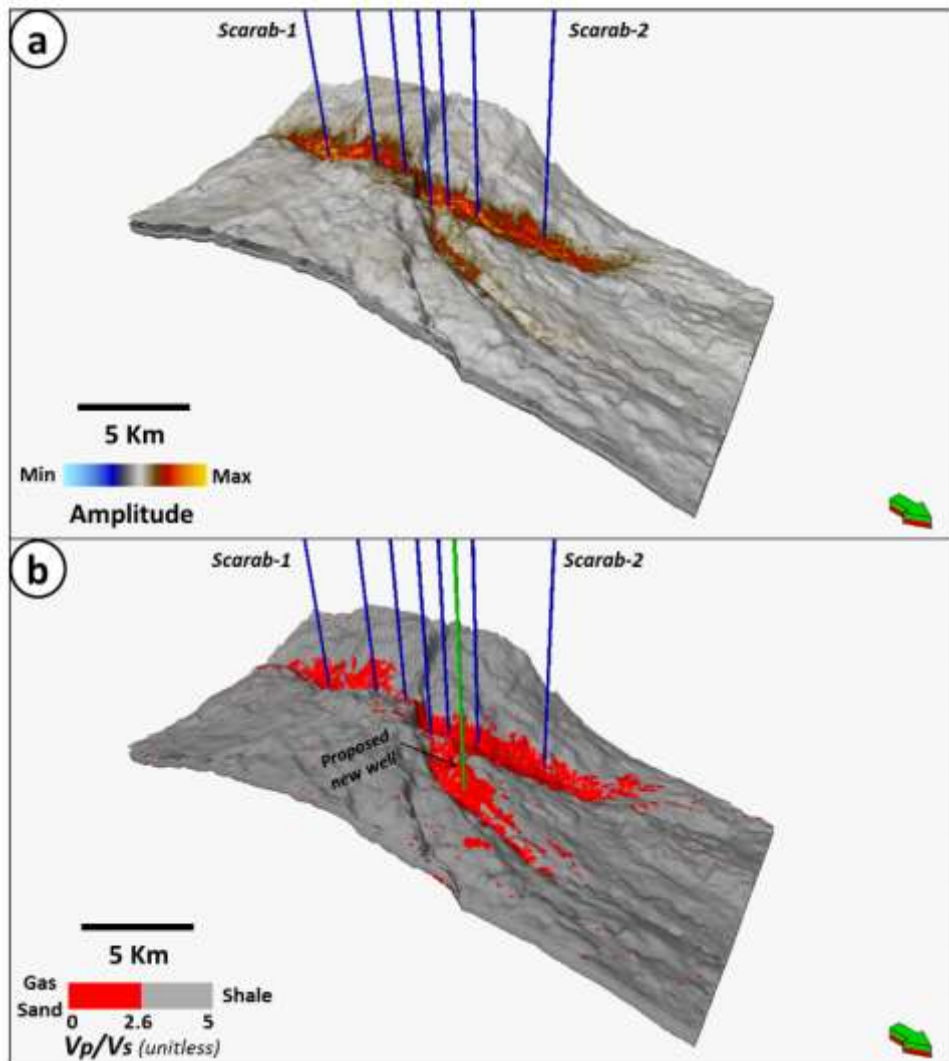


Figure 7: Amplitude slice over Channel 1 reservoir (a) compared with V_p/V_s slice (b). Note that all wells were drilled in the main channel body. Based on the study, a new well (in green) is proposed in the eastern branch.

attribute slice over the top Channel 1 reservoir shows the distribution of the gas sands that is consistent with the AVO analysis results. The pre-stack inversion results were successfully used for accurate GIIP estimation and it added new reserves.

ACKNOWLEDGMENTS

The author would like to thank the Egyptian General Petroleum Corporation (EGPC) and Rashid Petroleum Company (RASHPETCO) for providing the data and for the permission to publish this study. I would also like to thank Islam Ali from RASHPETCO for his help and advice.

REFERENCES

- [1] Samuel, A., Kneller, B., Raslan, S., Andy, S. and Parsons, C. [2003] Prolific deep-marine slope channels of the Nile Delta, Egypt. *AAPG Bulletin*, 87, 541-560.
- [2] Rutherford, S. R. and Williams, R. H. [1986] Amplitude-versus-offset variations in gas sands. *Geophysics*, 54, 680-688.
- [3] Goodway, W., Chen, T. and Downton, J. [1997] Improved AVO fluid detection and lithology discrimination using Lamé petrophysical parameters; from P and S inversions. *CSEG meeting abstracts*, 148-151.