

12-1-2018

Section: Chemistry

URANIUM REMOVAL FROM AQUEOUS SOLUTION USING TRI-N-BUTYL PHOSPHATE AND DI-2-ETHYLHEXYL PHOSPHORIC ACID FUNCTIONALIZED POLYESTER SHEET AND CHARCOAL AS ADSORBENTS

Shabaan M.

Alazhar University, Faculty of science (boys), Cairo, Egypt

Daher M.

Nuclear Material Authority, Box 530, Maadi-Kattameya, Cairo, Egypt

Hussein M.

Nuclear Material Authority, Box 530, Maadi-Kattameya, Cairo, Egypt

Abdel Aal M.

Nuclear Material Authority, Box 530, Maadi-Kattameya, Cairo, Egypt

Hosni G.

Alazhar University, Faculty of science (boys), Cairo, Egypt

Follow this and additional works at: <https://absb.researchcommons.org/journal>

 Part of the [Life Sciences Commons](#)

See next page for additional authors

How to Cite This Article

M., Shabaan; M., Daher; M., Hussein; M., Abdel Aal; G., Hosni; and S., Awais (2018) "URANIUM REMOVAL FROM AQUEOUS SOLUTION USING TRI-N-BUTYL PHOSPHATE AND DI-2-ETHYLHEXYL PHOSPHORIC ACID FUNCTIONALIZED POLYESTER SHEET AND CHARCOAL AS ADSORBENTS," *Al-Azhar Bulletin of Science*: Vol. 29: Iss. 2, Article 5.

DOI: <https://doi.org/10.21608/absb.2018.33766>

This Original Article is brought to you for free and open access by Al-Azhar Bulletin of Science. It has been accepted for inclusion in Al-Azhar Bulletin of Science by an authorized editor of Al-Azhar Bulletin of Science. For more information, please contact kh_Mekheimer@azhar.edu.eg.

URANIUM REMOVAL FROM AQUEOUS SOLUTION USING TRI-N-BUTYL PHOSPHATE AND DI-2-ETHYLHEXYL PHOSPHORIC ACID FUNCTIONALIZED POLYESTER SHEET AND CHARCOAL AS ADSORBENTS

Authors

Shabaan M., Daher M., Hussein M., Abdel Aal M., Hosni G., and Awais S.

URANIUM REMOVAL FROM AQUEOUS SOLUTION USING TRI-N-BUTYL PHOSPHATE AND DI-2-ETHYLHEXYL PHOSPHORIC ACID FUNCTIONALIZED POLYESTER SHEET AND CHARCOAL AS ADSORBENTS

Shabaan S. M.¹, Daher A. M.², Hussein A. E. M.², Abdel Aal M. M.², Hosni A. G.¹
And Awais M. S.²

¹Alazhar University, Faculty of science (boys), Cairo, Egypt.

²Nuclear Material Authority, Box 530, Maadi-Kattameya, Cairo, Egypt.

Corresponding author: Hosni Anwar, Hosniag@Alazhar.edu.eg

Phone 00201126879760

Chemistry department, Faculty of science, Al-Azhar University, Cairo, Egypt.

1- ABSTRACT

The present investigation deals with the removal of uranium from a nitric acid waste solution (Raffinate solution: produce during yellow cake of uranium production) using the extraction chromatography technique (solvent impregnated material), where Tri-N-butyl phosphate (TBP) and Di-2-ethylhexyl phosphoric acid (D2EHPA) solvents were impregnated upon polyester sheet and charcoal respectively then the impregnated resin were tested for uranium removal. Thus, the factors affecting the impregnation process namely, solvent concentration, impregnation time, volume/mass ratio, impregnation temperature and diluents type were studied. Secondly the influences of initial uranium concentration, adsorption temperature, contact time, pH on the uranium adsorption on the prepared materials were studied. From the results the isotherm models also calculated to determine uranium adsorption behavior by the prepared TBP and D2EHPA impregnated polyester sheet and charcoal respectively. Both prepared materials were found to be fitted with Langmuir than Freundlich model isotherm.

Keywords: Uranium, Removal, D2EHPA, TBP, Impregnation, Adsorption, Elution

2- INTRODUCTION

Uranium as a key element in nuclear fuel cycle is abundant in aquifers around mining, processing and milling sites, posing a potential environment and health risk to the biosphere due to its radioactivity and toxicity [1-3]. Many methods were used for treating the high concentration radioactive wastewater such as chemical precipitation, ion-exchange, extraction and reverse osmosis process [4-7]. These methods are so cost when they are used to treat the low concentration radioactive wastewater [8, 9]. Liquid-liquid extraction usually used an aqueous phase and an organic phase containing extractants [10-12], and the key point is the extractants [13, 14]. Some alternative methods with similar principles of solvent extraction have been developed for metal partitioning and extraction, such as solid

phase extraction (SPE) and ion-exchange chromatography (IEC) [15-17]. Solid-liquid extraction more beneficial in view of their total insolubility of the applied solid in the aqueous phase, its low rate of physical degradation besides, its high sorption capacity as well as its good flexibility and kinetic properties [18, 19]. Uranium nitrate in solution is usually present as cationic species. Consequently it could be selectively separated by ion exchange resins containing cation exchange functional groups. Ion exchange technique is low-cost, highly effective, efficient and easy to operate among the treatment processes. Ion exchange materials are widely used for the hydrometallurgical uranium recovery from acid leach mineral ore bodies [20].

In the present work uranium from nitric acid solution the solid phase extraction by

impregnate TBP and D2EHPA upon polyester and charcoal respectively has been done. Thus, the factors affecting the impregnation process namely, solvent concentration, impregnation time, volume/mass ratio, impregnation temperature and diluents type were studied. Then the effects of initial uranium concentration, adsorption temperature, contact time, pH of uranium adsorption on the prepared materials were studied. From the results the isotherm models also calculated to determine uranium adsorption behavior by the prepared TBP and D2EHPA impregnated polyester and charcoal respectively. Abstract finally, the optimum conditions were applied on waste solution sample.

3- EXPERIMENTAL

3.1. Materials and analytical procedure:

The liquid waste experimental sample (raffinate solution) used in this study was collected from Nuclear Materials Authority, Egypt its average chemical composition is shown in Table (1). All reagents used were of

Table (1): Chemical composition of the working raffinate waste sample

Constituent	Concentration
Fe ₂ O ₃	0.60 g/L
HNO ₃	1M
U(VI)	100 mg/L
Ca(II)	1.9 g/L

Analytical reagent grade. D₂EHPA, TBP, Uranyl nitrate were supplied from Riedel-deHaen. Synthetic solutions of the uranyl nitrate were prepared by dissolving the exact amount of uranyl nitrate in distilled water. Uranium concentration was determination spectrophotometrically by UV single beam model SP-8001'', Metretech Inc., version 1.02 using Arsenazo III method [21] at pH 2 [22] and by an oxidimetric titration against ammonium metavanadate method using N-phenyl anthranilic acid indicator (Sigma-Aldrich) [23, 24].

3.2. Preparation of adsorbent materials solvent (Impregnation procedure)

3.2.1. Preparation of the inert materials

The polyester sheet and charcoal macro porous were immersed in 2M HCl for 1 h, washed with distilled water until free of HCl, and air-dried overnight before using. The polyester sheet of 0.5 cm in diameter and 0.50 cm length (average weight = 0.05 g), was cut from a polyester sheet.

3.2.2. Impregnation procedure

To investigate the influences affecting impregnation process, series of impregnation experiments have been performed by shaking 0.25 g of the dry clean polyester sheet and charcoal samples with the properly prepared impregnation solutions of Tri-N-butyl phosphate (TBP) and Di-2-ethylhexyl phosphoric acid (D2EHPA) solvents (in benzene) solution by magnetic stirrers. The amount of solvent impregnated on the polyester sheet and charcoal samples were calculated by the difference between the weight before and after the process as the following equation. The studied factors included solvent concentration, impregnation temperature, impregnation time, mass/volume ratio and diluents type. After the end of the impregnation experiments, the foam is dried in the oven for 1 h at a temperature of 60°C to evaporate the diluent (leaving the diffused solvent into the materials pores).

$$\text{Mass Change, \%} = 100 \times \frac{m_2 - m_1}{m_1}$$

Where m_1 and m_2 are the dry polyester sheet and charcoal mass before and after impregnation process respectively.

3.3. Sorption Studies

3.3.1. Sorption Procedure

The behavior of uranium (VI) adsorption onto the prepared adsorbent materials was carried out by using batch sorption experiments via shaking 0.05g of impregnated materials with 10 mL of the uranium and synthetic solutions 160 mg/L each individually. The studied relevant adsorption factors are: effect of

contact time, initial uranium concentrations, pH and solution temperature. The adsorbed amounts of uranium were calculated by difference between the equilibrium and initial concentrations. The amount of ion retained in the solid phase q_e (mg/g) was calculated using the relation:

$$q_e, \text{mg/g} = (C_o - C_e) \times \frac{V}{M}$$

Where C_o and C_e are the initial and equilibrium concentrations of the metal in the aqueous phase in mol/L, respectively, V gives the volume of the aqueous phase solution in mL and m is the weighed dry impregnated resin in g. Where the uptake percent of the metal ion by the impregnated materials was calculated according to the following relation:

$$\text{Uptake, \%} = 100 \times (C_o - C_e) \times C_o$$

3.3.1.2. Equilibration Calculation

All uranium speciation in this study were performed with Hydra-MEDUSA, a chemical equilibrium calculation program [25, 26].

4. RESULT AND DISCUSSION

4.1. Results of the relevant impregnation process factors

4.1.1. Effect of solvent concentration

To determine the effect of TBP and D2EPHA concentration upon the impregnation results, several impregnation experiments were carried out using fixed conditions at temperature 25 °C, time of 1 h., v/m ratio is 5g /L and diluents is benzene. Different TBP and D2EPHA concentration is ranging from 0.028 up to 0.50 M. From the Fig (1) the impregnation by solvent increased as the solvent concentration increased reach to maximum at 0.45M concentration. Behind the later concentration the saturation of polymer and charcoal by solvent was reached. In other words the surface of the inert support was covered by solvent. Accordingly, 0.45M is the preferred condition for further impregnation experiments for TBP or D2EPHA upon polyester sheet and charcoal.

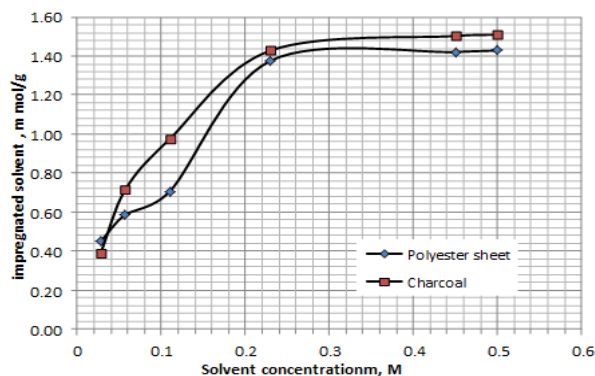


Fig. (1): Effect of solvents (TBP and D2EPHA) concentration upon the impregnated amount onto the dry polyester sheet and charcoal (T: 25 °C, time: 1 h., ratio: 5/1 and Diluents: benzene. Conc.: 0.028 - 0.5 M or Molar).

4.1.2. Shaking Time Effect

To determine the effect of impregnation time or shaking time upon the impregnated solvent amount upon polyester sheet and charcoal, several impregnation experiments were carried out using fixed conditions of temperature 25 °C, solvents concentration of 0.45M, v/m ratio of 5/1 and benzene as diluent. Shaking time is ranging from 0.5 to 24 hours. From the Fig (2) the impregnated by solvent amount is gradually increased from the first experiment to the fourth one of 5h. After 5 h of shaking time no investigated increase in the impregnated solvent amount. Consequently, 5h is sufficient time to fill of all the surface porous for both polyester sheet and charcoal and the surface are completely coated with solvents under these conditions.

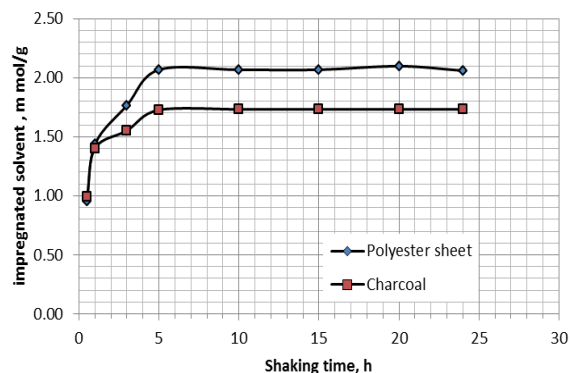


Fig. (2): Effect of shaking time upon the loaded amounts of TPB and D2EHPA onto polyester sheet and charcoal (T: 25 °C, time: 0.5 to 24 h., ratio: 5/1 and Diluents: benzene. Conc.: 0.45 Molar).

4.1.3. Effect of mass/volume ratio

To study the effect of m/v ratio upon the amounts of TBP and D2EHPA impregnated onto the working polyester sheet and charcoal samples, two series of impregnation experiments were performed using m/v ratios started from 1/1 up to 1/10. These experiments were performed under fixed conditions of 25 °C impregnation temperature, 5 h impregnation time, 0.5 M solvent concentrations and using benzene as diluent. The obtained results are plotted in Fig. 3. From this figure the amount of loaded solvent onto the polyester sheet and charcoal increased with increasing the impregnation solution m/v ratio. After m/v of 5 g/L the impregnated amount were approximately fixed. From the mentioned above 5g/L m/v ratio were the preferred for both polyester sheet and charcoal.

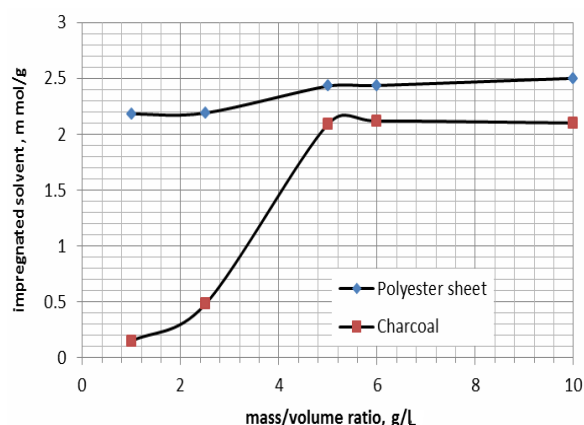


Fig. (3): Effect of impregnation solution ratio upon the loaded amount of TBP and D2EHPA onto polyester sheet and charcoal (T: 25 °C, time: 5 h., ratio: 1/1 up to 1/10 and Diluents: benzene. Conc.: 0.45 Molar).

4.1.4. Effect of impregnation temperature

The effect of temperature upon the impregnation process, series of impregnation experiments were carried out using temperatures ranged from 25 to 70 °C. These experiments were performed under fixed conditions of 5 h impregnation time, 0.45 M solvent concentrations, using benzene as diluent and 5g/L. From the obtained results (Fig. 4), the impregnated amounts were

decreased as the impregnation temperature increase. This phenomenon could be explained by the shape change of the inert support especially polyester sheet and the viscosity change of both TBP and D2EHPA solvents. Thus the preferred impregnation was room temperature 25 °C.

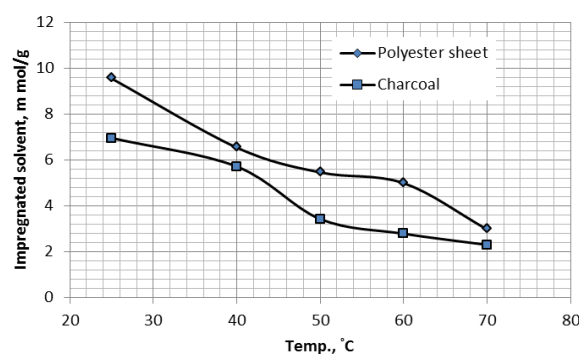


Fig. (4): Effect of impregnation temperature upon the impregnated Amount of TBP and D2EHPA onto polyester and charcoal (Conc.: 0.45 M; t: 5 h., ratio: 5/1 and Diluent: benzene).

4.1.5. Effect of diluents type

The impregnation solvents were diluted before its impregnation processes on polyester sheet and charcoal to reducing the solvent viscosity. By reducing the solvents viscosity the solvents extended on the supports surface and filling its interior pores. Different diluents were tested, namely; benzene, toluene, acetone, but-1-ol, and kerosene. The impregnation experiments were carried out under fixed conditions for both materials (polyester sheet and charcoal) of 0.45 M solvent concentrations, 5/1 for mass/liquid ratio, impregnation time of 5 h for and the impregnation temperatures 25 °C. Fig 5 shows the obtained results which indicate that highest impregnation amounts were performed in benzene. In this case, benzene will be used as solvents diluent.

4.1.6. Choice of optimum conditions for impregnation :

As it was mentioned before, the impregnation process of TBP and D2EHPA on polyester sheet and charcoal is mainly due to a combination of pore filling as well as surface

adsorption i.e. the extractants fill almost all porous system of polyester sheet and charcoal. Owing to the obtained results of the study of the relevant factors affecting polyester sheet and charcoal impregnation, we could safely choose the following preferred conditions; 0.45 M solvents concentration, 5 h impregnation time, 1/5 mass/volume ratio, 25 °C impregnation temperature and benzene as diluent.

4.2. Results of equilibrium sorption studies

In order to study the different factors affecting uranium sorption onto the prepared polyester sheet impregnated by TBP (PESIS) and charcoal impregnated by D2EHPA (CCIS), suitable amount (1.5 g) of each materials were treated with the two solvents under the above mentioned preferred impregnation conditions and used for the next studies. The studied factors are effect of contact time, effect of initial uranium concentrations, effect of solution pH and effect of adsorption temperature.

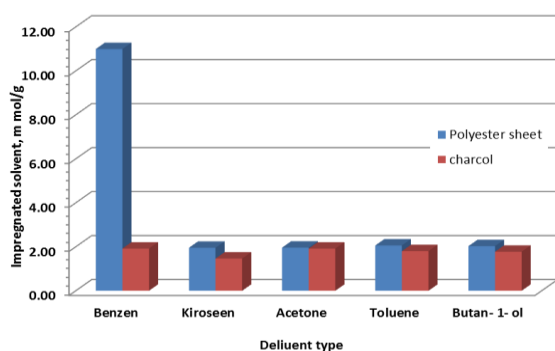


Fig. (5): Effect of diluents type upon the (TBP; D2EHPA) amounts onto the dry polyester sheet and charcoal (Conc.: 0.5 M; t: 5 h., ratio: 5/1 and T: 25 °C)

4.2.1. Effect of contact time

To determine the sorption equilibrium time of uranium by the prepared PESIS and CCIS, two series of sorption experiments were carried. The experiments were installed by contacting about 0.05 g from each material with the uranium stander solution having concentration of 160 and 220 mg/L for polyester sheet and charcoal respectively. The contact time was ranged from 15 to 300

minutes. The other factors were fixed at temperature of 25 °C, solution pH of 3.40 and v/m ratio 5g/L. The result was summarized in Fig. (6) which shows that the removal efficiency increasing by increasing the contact time from 15 min to about 50 min. beyond the 3th experiment (30min) in case of polyester sheet and 4th experiment (60 min.) in case of charcoal no significant improvement in the sorption efficiency were observed preferred. Accordingly, 30 and 60 min were chosen as contact time for sorption of uranium upon polyester sheet and charcoal respectively.

4.2.2. Effect of pH

To determine the influence of pH value of the working solution upon uranium sorption onto the prepared PESIS and CCIS, two series of batch equilibrium experiments were achieved using different pH values ranging from 0 up to 7. The experiments were performed under fixed of the other factors of initial uranium concentration of 100 mg/l for each PESIS and CCIS, at room temperature (\approx 25 °C), contact time of 30 and 60 min for PESIS and CCIS respectively. To reach the required pH values different amount of HNO₃ or NaOH were added. The aliquots (samples) of the uranium stander solution concentrations were fixed at 100 mg/L by adding specific quantities of uranium solution to compensate for the change occurred during pH adjustment. The results were plotted in Fig (7). The latter figure indicates that, the sorption efficiency decreasing significantly by increasing the solution pH beyond pH of 4 in both cases of PESIS and CCIS. This means that the adsorption of uranium is independent on the surface characteristics of the adsorbents at various pH values but may be correlated to the permanent surface negative charge of the prepared adsorbent and the chemical species forms of uranium in the aqueous phase.

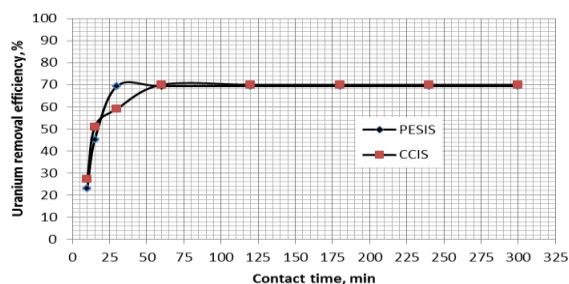


Fig. (6): Effect of contact time upon uranium sorption efficiency onto PESIS (T= 25 °C; pH = 3.08; U conc. = 220 ppm ratio 5g/l) and CCIS (T = 25 °C; pH = 3.40; U conc. = 160 ppm; ratio=5g/l).

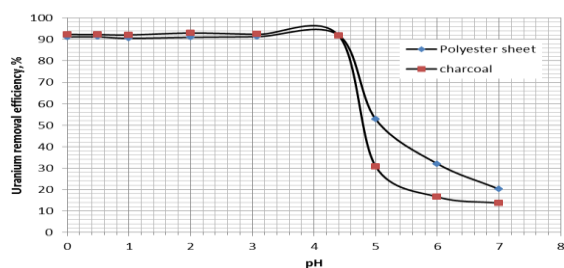



Fig. (7): Effect of solution pH upon uranium sorption efficiency onto PESIS and CCIS

(T= 25 °C; U conc. =100 mg/L; ratio=5g/l,).

The aqueous speciation distribution of uranium was calculated using Hydra-Medusa chemical equilibrium database and plotting software [25, 26] and obtained in Fig. 8. The results showed that the complexes of $UO_2NO_3^+$ and UO_2^{2+} were the main species at the pH

range from 0 - 4 with mean total percent of about 35% and 65 % respectively. At near neutral and alkaline pH conditions, U-hydroxide complexes start to dominate the aqueous phase. At pH 7, the $UO_2(OH)_2 \cdot H_2O$ became the major species with about 100% of total concentration at pH range from 4.5 to 10.5 while at pH 12, $UO_2(OH)_3^-$ became the main species within a total percent close to 70% of the total concentration. The formation of $UO_2(OH)_4^{2-}$ species started to grow after pH 10.

According to the latter identification, the sorption mechanism of uranium on TBP impregnated polyester sheet was mainly solvation reaction. This conclusion was supported by the structural characteristics of TBP that have solvation properties, where the sorption mechanism could be suggested by succeeding equations [27].



In case of D2EHPA impregnated charcoal was mainly pure ion surface complexation reaction. This conclusion was supported by the structural characteristics of D2EHPA that have ion exchange properties, where the adsorption mechanism could be proposed by following equations [28].



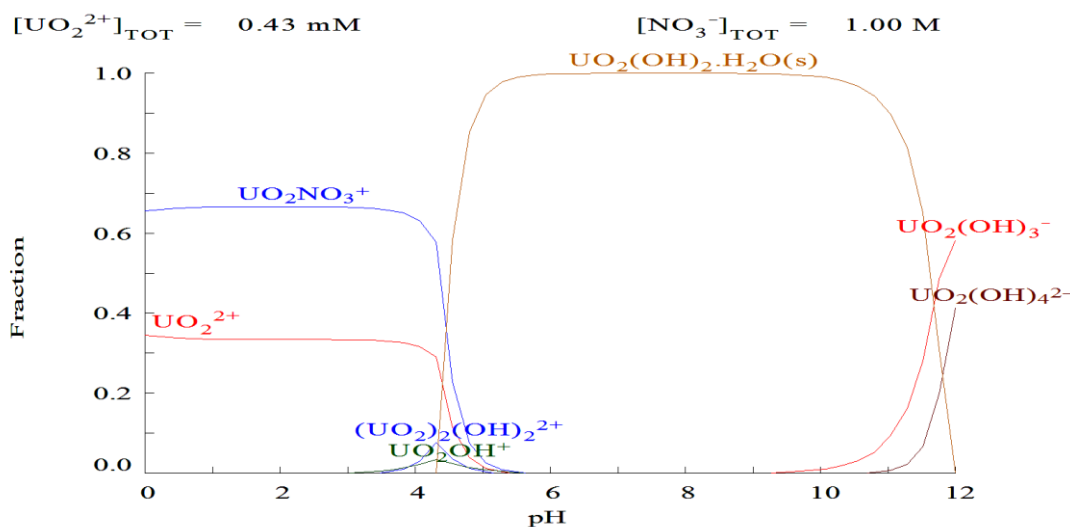


Fig. (8): Predicted aqueous speciation of U (VI) as a function of pH in 1 M HNO₃ (pH of 0) using Hydra-Medusa program



Where (HD) is D2EHPA.

4.2.3. Effect of initial uranium concentration

To examine the effect of initial uranium concentration on the sorption efficiency onto prepared **PESIS** and **CCIS**, two series of experiments were achieved by equilibrating 5g/L of nitrate solutions having different concentrations of the uranium ranged from 60 to 10000 mg/L for 30 and 60 min for **PESIS** and **CCIS** respectively at room temperature ($\approx 25^\circ\text{C}$) and solution pH about 1. The result was obtained in Fig. 9 as a relation between uranium sorption efficiency and uranium ion concentration. From the obtained data, it was noticeable that uranium sorption efficiency decreased with increasing its initial concentration. The uranium adsorption capacity of prepared adsorbents materials are about 370 and 260 mg U/g **PESIS** and **CCIS** respectively.

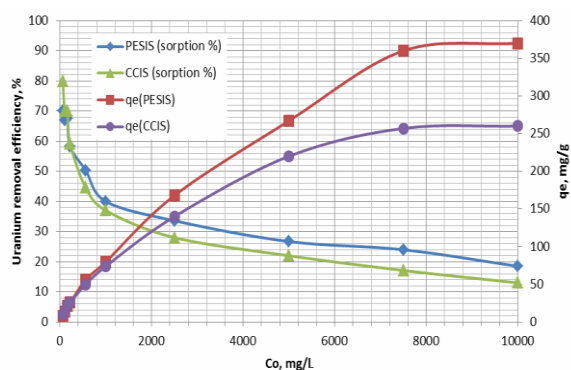


Fig. (9): Effect of uranium concentrations on sorption efficiency onto the prepared PESIS and CCIS

4.2.4. Effect of sorption temperature

To study the impact of temperature upon the uranium sorption onto the prepared **PESIS** and **CCIS**, two series of sorption experiments were performed using different temperatures ranging from 25 up to 70 °C. In these experiments the other parameters were kept

constant, at an initial uranium concentration of 100 mg/L, solution pH value of 1 and a shaking time of 30 and 60 min. for **PESIS** and **CCIS** respectively. From the obtained results plotted in Fig. (10), it is obviously that uranium sorption efficiency decreased with increasing the temperature. This may due to polyester sheet and charcoal surface change (become more flexible in case of polyester). For this reasons, room temperature ($\approx 25^\circ\text{C}$) was chosen as the preferred temperature.

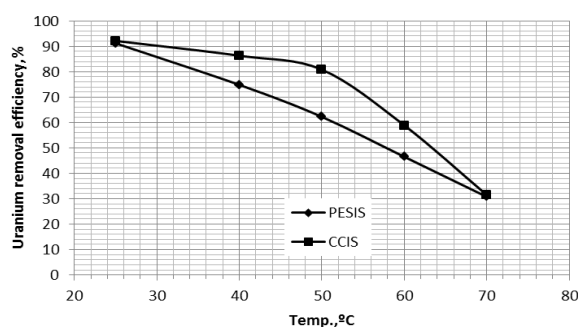


Fig. (10): Effect of solution temperature upon uranium sorption efficiency onto PESIS and CCIS (pH = 1; U conc. 100 mg/L and t= 30 and 60 min PESIS and CCIS respectively)

4.2.5. Effect of the ratio of mass/volume ratio

The effect of **PESIS** and **CCIS** mass / nitrate solution on the uranium (100 mg/L) sorption efficiency from nitrate solution was studied in the range from 1 to 10 g/L at sorption time of 30 and 60 min **PESIS** and **CCIS** respectively, solution pH of 1 at room temperature ($\approx 25^\circ\text{C}$) was explored. The experimental results were plotted in table Fig.11 as a relation between uranium sorption efficiency and mass/volume ratio. As exposed in this figure the uranium adsorption efficiency percent increases from 40 and 45 to about 92 and 91 for **PESIS** and **CCIS** respectively by increasing the mass/volume ratio from 1 to 5 g/L. Beyond mass/volume of 5g/L there are no significant increasing in sorption efficiency. Therefore, **PESIS** and **CCIS** mass/ nitrate solution ratio were kept at 5 g/L during all the experiments.

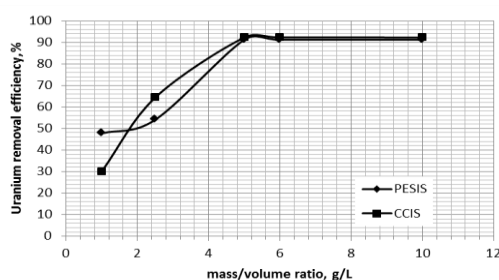


Fig. (11): Effect of solution m/v ratio upon uranium sorption efficiency onto PESIS and CCIS

4.2.6. Sorption isotherms

The general sorption isotherms calculated from the variation of the initial concentration of uranium and calculating the remaining concentration. The distribution of the metal ion on **PESIS** and **CCIS** surface interfaces at equilibrium has been applied to different isotherms. The Langmuir isotherm was tested by plotting C_e/q_e vs. C_e where C_e (g/L) is the equilibrium concentration of the metal ion; q_e ($\text{mg}_{\text{metal}}/\text{g}_{\text{sorbent}}$) is the metal ion concentration in Fig. (18, 20) the obtained linear relation indicates that the extraction of U (VI) obeys Langmuir isotherm. **Langmuir equation** can be written as:

$$C_e / q_e = 1/b Q^0 + C_e / q^0$$

Where b is Langmuir constant, Q^0 ($\text{mg}_{\text{metal}}/\text{g}_{\text{sorbent}}$) is the maximum amount of metal taken up. From the slope and the intercept of the linear relation obtained in Fig (12, 14) b for U (VI) is 0.0006 and 0.0009 for polyester sheet impregnated with TBP and charcoal impregnated with D2EPHA. Although the **Frundlich isotherm** is usually regarded as empirical, this isotherm is applied by drawing a plot of $\log q_e$ vs. $\log C_e$. The logarithmic form of the equation is

$$\text{Log } q_e = \text{log } K_f + 1/n \text{ log } C_e$$

Where n , K_f are constants representing the adsorption capacity and intensity of adsorption respectively, they depend on the nature of the adsorbate, adsorbent, and temperature. The extraction of U (VI) was found to follow the Frundlich isotherm due to the linear relation

which obtained in Fig. (13, 15) from the slope and intercept of the plot, the Frundlich parameters are calculated K_f found and $1/n$ to be 1.57 , 2.58 mg/g and 0.621 and 0.5235 for polyester sheet impregnated with TBP and charcoal impregnated with D2EPHA .

SEM Characterization

The surface of the impregnated supports was detected using Scanning Electron Microscope (SEM) in order to illustrate the change in the surface feature of the materials before and after impregnation and after uranium sorption. The obtained SEM was applied at different magnifications of at X100, 200 and 1000 for both adsorbents.

Fourier Transform Infrared Spectrometer (FTIR)

In order to support the pore filling phenomenon, the study polyester sheet and charcoal were subjected to qualitative IR spectroscopic characterization before and after its impregnation with the tri-N-butyl phosphate (TBP) and Di-2-ethylhexyl phosphoric acid (D2EHPA) solvent (Fig. 22 a, b, c) of the spectrum (a) before loading with TBP solvent, (b) after TBP loading and (c) after uranium adsorption. Shows the P=O and C–O–P stretching vibrations at 1227 and 1020 cm^{-1} . The spectrum (c) (after loading with uranium) shows stretching band at 1099 and 1022 cm^{-1} which is characteristic formed complex between uranium and TBP on the polyester sheet.

Figure 23 a, b, c refers to charcoal before impregnation (Fig. 23 a) by Di-2-ethylhexyl phosphoric acid (D2EHPA) and after impregnation (Fig. 23 b) and after uranium loading (Fig. 23 c). In figure 23 a, the characterized spectrum of charcoal at 1081 and 3451 cm^{-1} of O-H and C=O group respectively. After impregnation the characterized bands of P-O-H, P-O-C and P=O at 885, 1032 and 1222 cm^{-1} of D2EHPA. After loading of uranium the D2EHPA characterized bands were shifted to 930, 1034 and 1202 cm^{-1} . These refer to the formation of complex between uranium and D2EHPA on the charcoal surface.

Table (2): Langmuir and Freundlich parameters for uranium sorption onto PESIS and CCIS

	Frundlich isotherm model			Langmuir isotherm model		
	1/n	Kf (mg/ Kg)	R ²	Qm	b (L/ mg)	R ²
TBP	0.621	1.57	0.9955	434	0.0006	0.947
D2EHPA	0.523	2.58	0.9951	285.7	0.0009	0.970

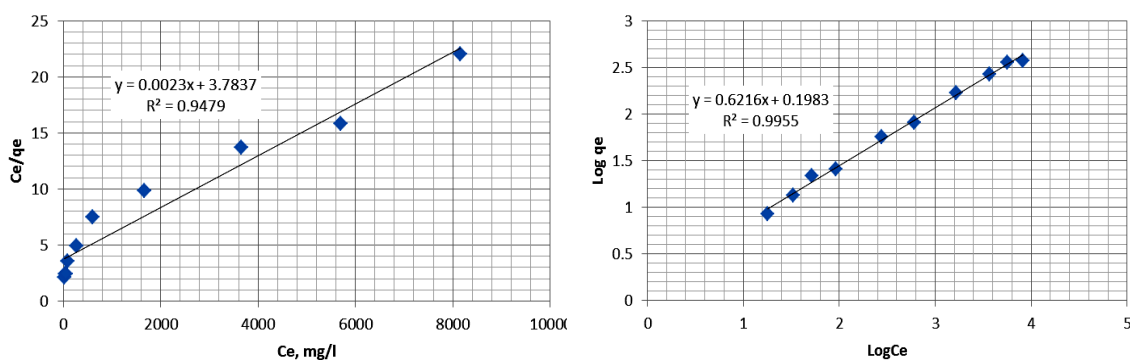


Fig (12, 13): Langmuir and Freundlich sorption isotherms for uranium onto the prepared PESIS

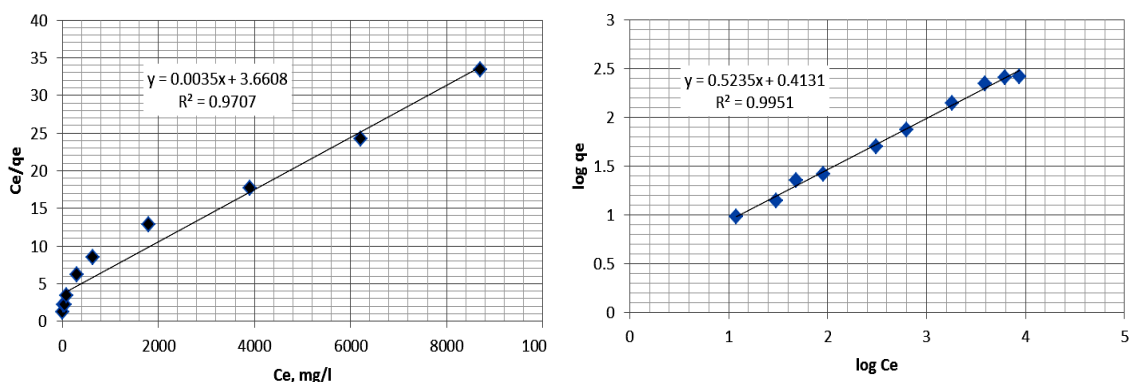


Fig (14, 15): Langmuir and Freundlich sorption isotherms for uranium onto the prepared CCIS

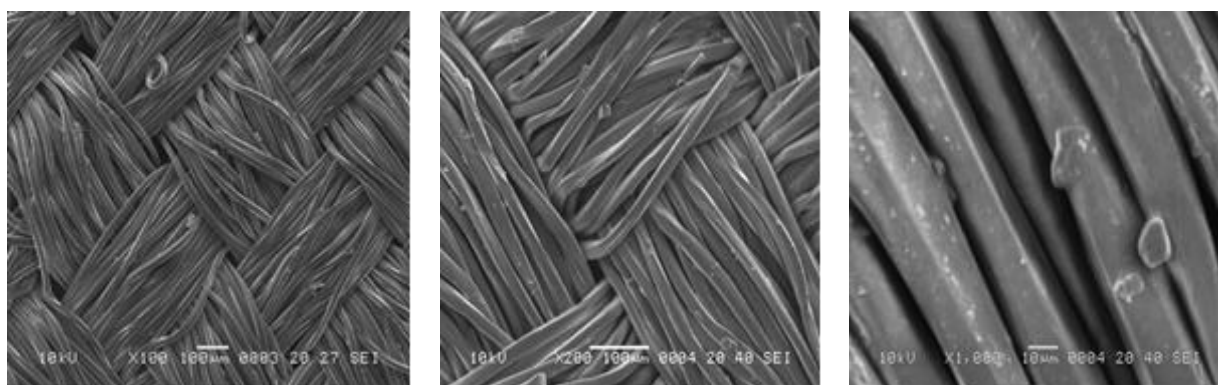


Fig. (16): SEM photographs of the polyester sheet surface before impregnation with TBP

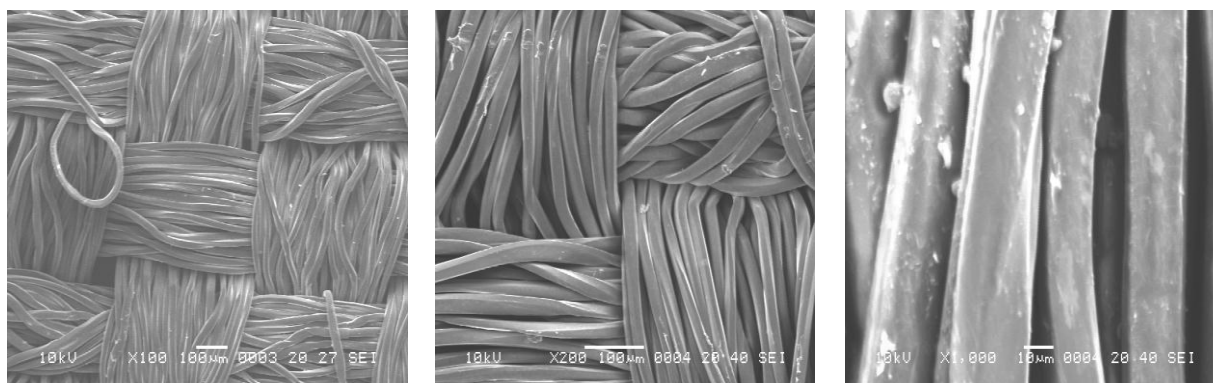


Fig. (17): SEM photographs of the polyester sheet surface after impregnation with TBP

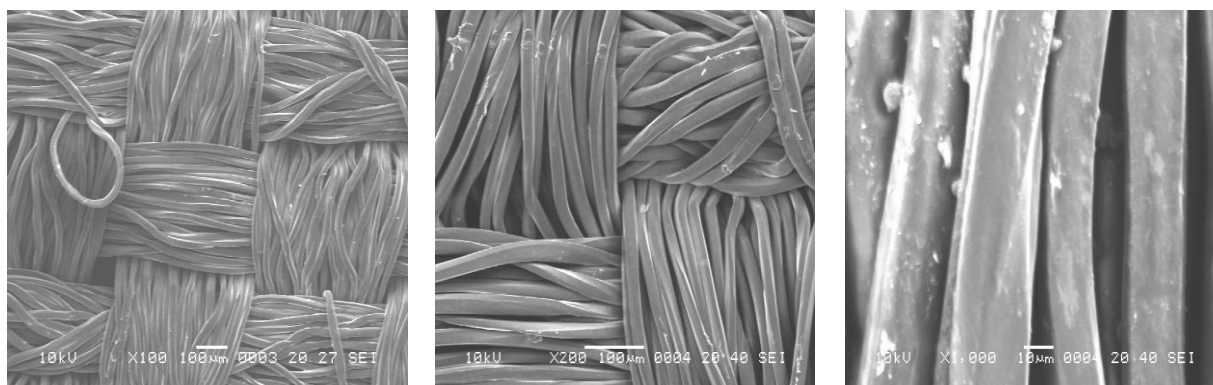


Fig. (18): SEM photographs of the polyester sheet surface after impregnation with TBP after uranium loaded

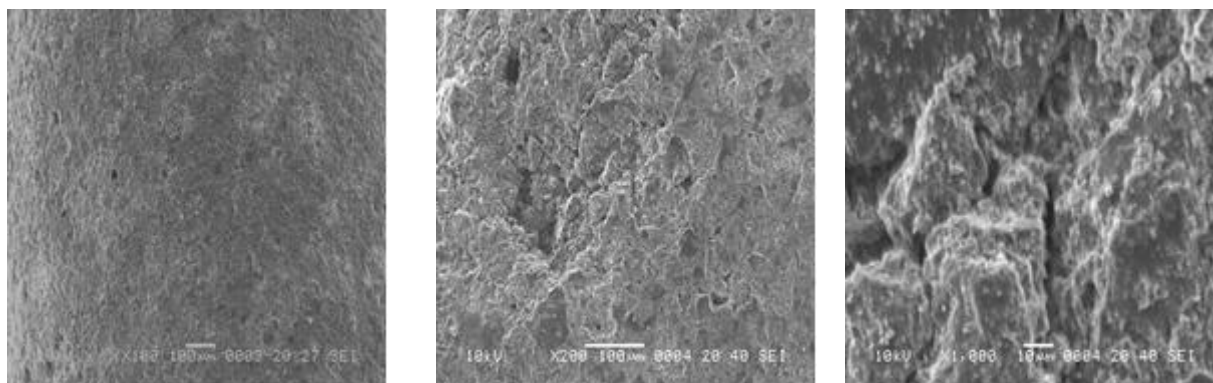


Fig. (19): SEM photographs of the charcoal sheet surface before impregnation with D2EHPA

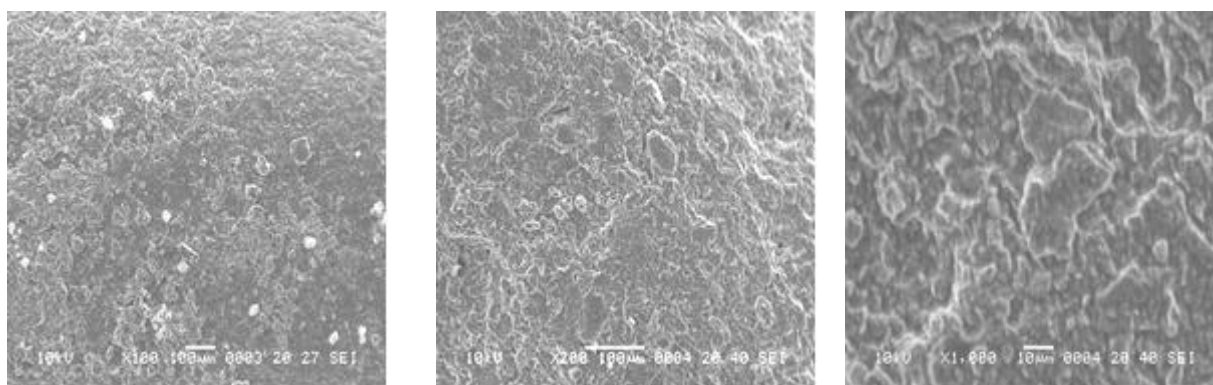


Fig. (20): SEM photographs of the charcoal sheet surface after impregnation with D2EHPA

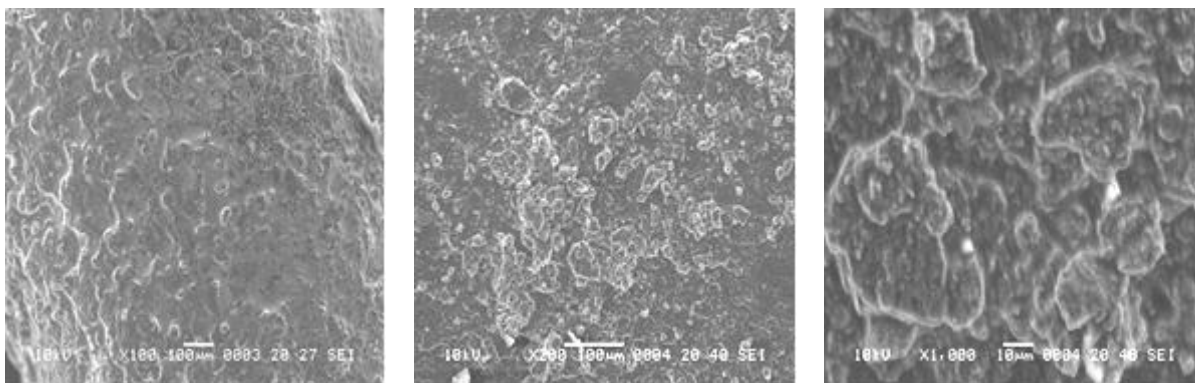


Fig. (21): SEM photographs of the charcoal sheet surface after impregnation with D2EHPA after loaded by uranium

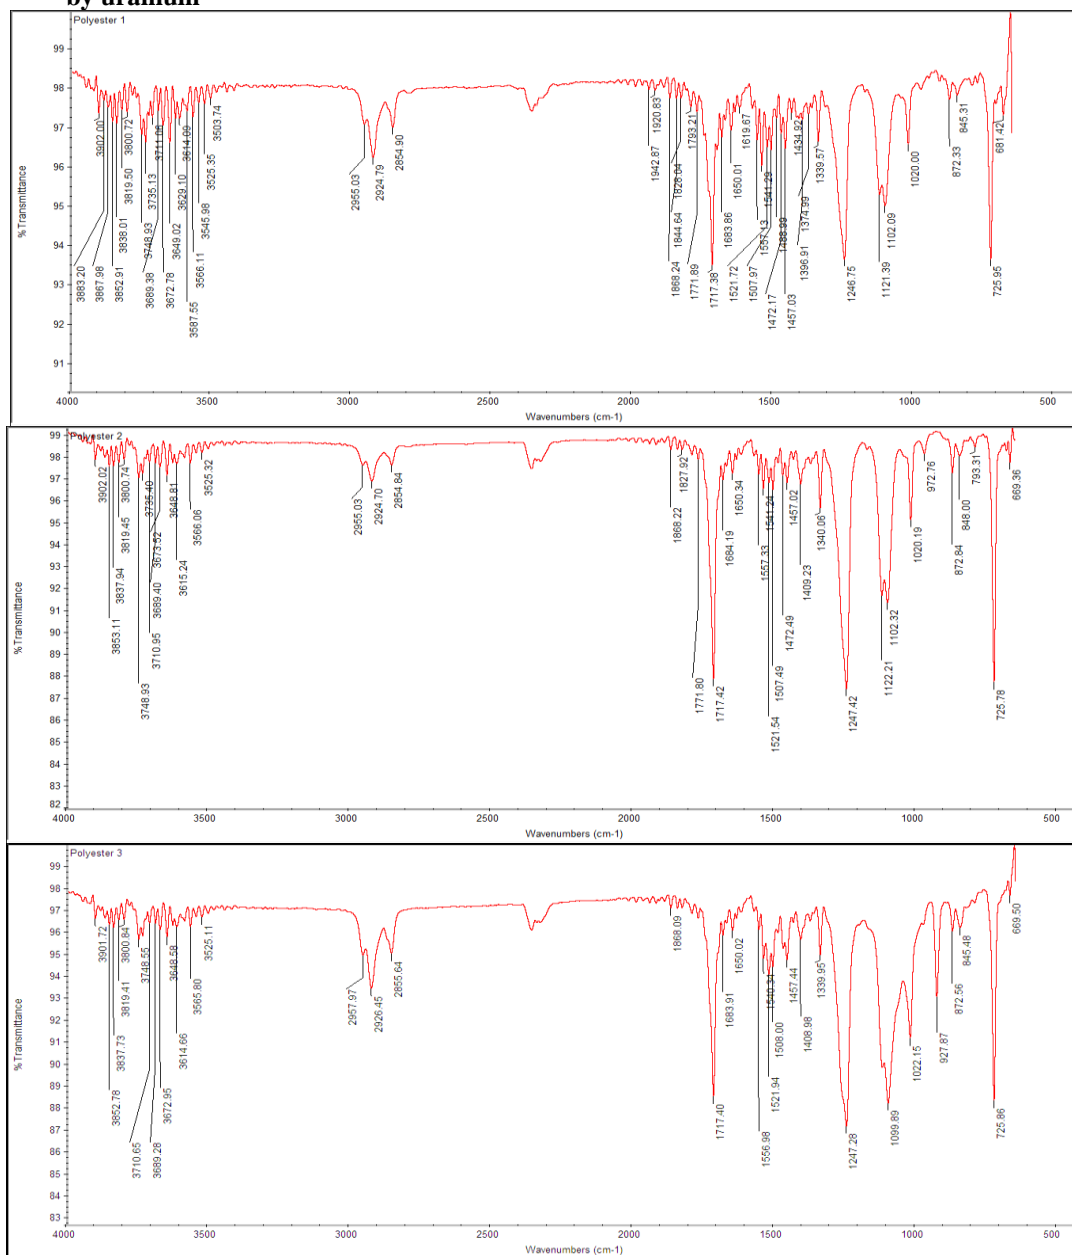


Figure (22): IR photographs of the polyester sheet surface before impregnation, after impregnation by TBP and after uranium loading

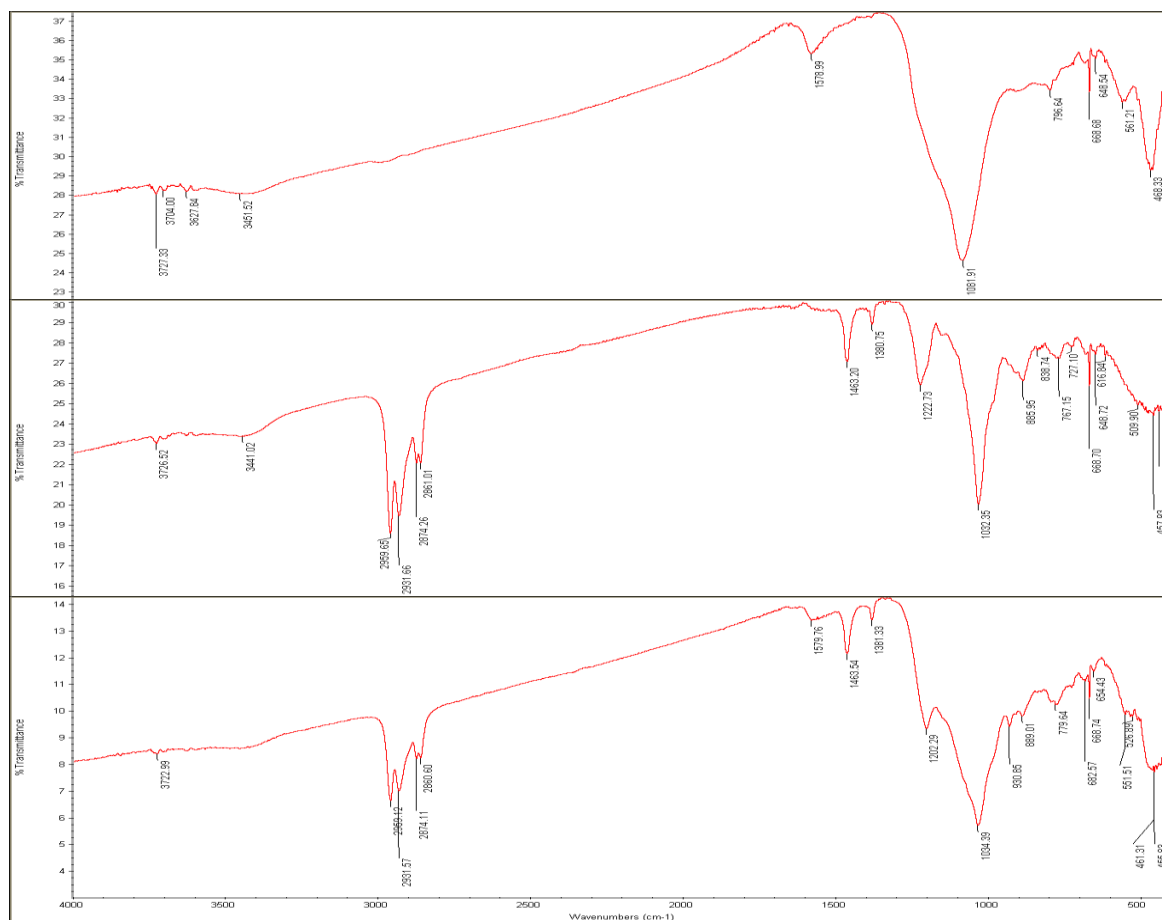


Figure (23 a, b, c): IR photographs of the charcoal surface before impregnation, after impregnation by D2EHPA and after uranium loading.

Elution Studies

In order to achieve maximum uranium elution from the prepared adsorbents, number of elution experiments were carried out to elute the uranium ion from the impregnated polyester sheet and charcoal. Uranium loaded materials were subjected to elution experiments by contacting fixed amount (0.1g) with different eluent solutions (10 ml) of H₂O, 1M NaCl+0.1M H₂SO₄, HNO₃, Tartaric acid, citric acid and Na₂CO₃ with different concentrations to obtain the maximum elution efficiency.

From the obtained results plotted in Fig. 24 and Fig. 25 showed that 1M Na₂CO₃ and 0.1 M HNO₃ elute about 96 and 95% from the loaded uranium on prepared polyester sheet and charcoal.

Case study (Uranium removal from the raffinate solution)

- Uranium adsorption

As previously stated, the prepared adsorbents has uranium adsorption capacity (about 434mg U/g polyester sheet impregnated by TBP and about 285 mg U/g charcoal impregnated by D2EHPA). In the present work, the study of uranium removal from **Nuclear Material Authority, Egypt**, liquid raffinate solution was carried out. Batch experiment was performed by contacting different amounts (0.1g) of prepared polyester sheet impregnated by TBP and charcoal impregnated by D2EHPA.

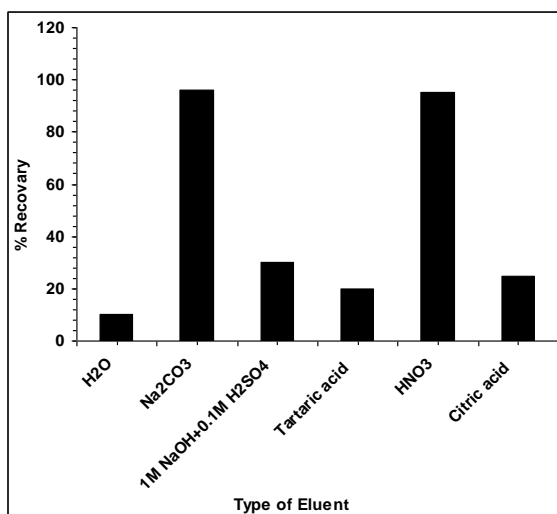


Fig. (24): Effect of different eluent reagents on uranium elution efficiency from polyester impregnated by TBP.

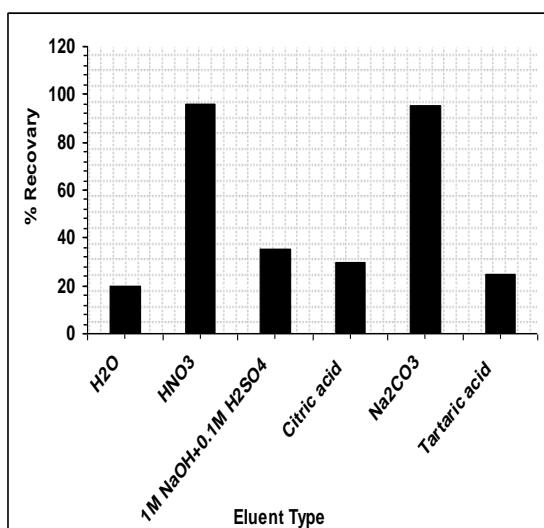


Fig (25): Effect of different eluent reagents on uranium elution efficiency from charcoal impregnated by D2EHPA.

Each 0.1g were contacted with two different volumes (200 mL) of raffinate for 90 min. the calculated loaded uranium content from its analysis in the effluent samples were illustrated in table 3.

Uranium elution

Using the 1M Na₂CO₃ and 0.1 M HNO₃ eluent reagents about 94 and 93% from the loaded uranium on polyester sheet and charcoal were eluted. By calculating of the eluted uranium amounts revealed that 434 and 285.70 mg uranium/g polyester sheet and charcoal were eluted.

CONCLUSION

The results of this indicate that the polyester and charcoal could be converted into efficient adsorbent materials for uranium removal from aqueous solution by impregnating those materials with different solvents. The maximum adsorption capacity of the prepared impregnated materials is about 434 and 285 mg/g. Adsorption isotherms indicate that uranium adsorption onto the prepared impregnated materials is a monolayer adsorption process. The resulting test on the uranium ion removal from raffinate solution could serve as a potential application of these adsorbents in industrial wastewater treatment.

Table 3: Results of uranium removal from real raffinate solution by the prepared materials

Adsorbent material	Raffinate solution, ml	uranium amount, g	Adsorbent amount, g	Adsorbed uranium amount, g	Theoretical adsorbed amount, g/g	Different between theoretical and practical capacities, %	cause
Polyester	200	0.2	0.1	0.184	0.434	42.3	Iron competition
Charcoal				0.170	0.285	59.6	

ACKNOWLEDGEMENT

The author would like to express his sincere thanks to **Prof. Dr. A. E. M. Hussein** for deeply useful scientific discussions during performing this paper.

REFERENCE

- 1- S. Chakraborty, F. Favre, D. Banerjee, A.C. Scheinost, M. Mullet, J.J. Ehrhardt, J. Brendle, L.C. Vidal, L. Charlet, U(VI) Sorption and Reduction by Fe(II) Sorbed on Montmorillonite, *Environ. Sci. Technol.* 44(2010) 3779-3785.
- 2- M. Majdan, S. Pikus, A. Gajowiak, D. Sternik, E. Zięba, Uranium sorption on bentonite modified by octadecyltrimethylammonium bromide, *J. Hazard. Mater.* 184(2010) 662-670.
- 3- Y. Sun Y, C. Ding, W. Cheng, X. Wang, Simultaneous adsorption and reduction of U(VI) on reduced graphene oxide-supported nanoscale zerovalent iron, *J. Hazard. Mater.* 280(2014) 399-408.
- 4- Kawabata Y, Aparin V, Nagai M, Yamamoto M, Shiraishi K, Katayama Y (2008) Uranium and thorium isotopes from Kazakhstan. *J Radioanal Nucl Chem* 278(2):459–462.
- 5- Chellam S, Clifford DA (2002) Physical–chemical treatment of groundwater contaminated by leachate from surface disposal of uranium tailings. *J Environ Eng* 128:942–952.
- 6- Phillips DH, Gu B, Watson DB, Parmele CS (2008) Uranium removal from contaminated groundwater by synthetic resins. *Water Res* 42:260–268
- 7- Xie S, Yang J, Chen C, Zhang X, Wang Q, Zhang C (2008) Study on biosorption kinetics and thermodynamics of uranium by *Citrobacter freudii*. *J Environ Radioact* 99:126–133.
- 8- Rahman ROA, Ibrahim HA, Hung YT (2011) Liquid radioactive wastes treatment: a review. *Water* 3:551–565.
- 9- Camacho LM, Deng S, Parra RR (2010) Uranium removal from groundwater by natural clinoptilolite zeolite: effects of pH and initial feed concentration. *J Hazard Mater* 175:1–3
- 10- M.B. Mansur, S.D. Ferreira Rocha, F.S. Magalhaes, J.S. Benedetto, Selective extraction of zinc(II) over iron(II) from spent hydrochloric acid pickling effluents by liquid-liquid extraction, *J. Hazard Mater.* 150 (2008) 669-678.
- 11- M. Maradi, Y. Yamini, A. Esrafil, S. Seidi, Application of surfactant assisted dispersive liquid-liquid microextraction for sample preparation of chlorophenols in water samples, *Talanta* 82 (2010) 1864-1869.
- 12- J.S. Chiang, S.D. Huang, Simultaneous derivatization and extraction of anilines in waste water with dispersive liquid-liquid microextraction followed by gas chromatography–mass spectrometric detection, *Talanta* 75 (2008) 70-75.
- 13- R.F. Li, C.X. Liu, H.G. Zhao, S.H. He, Z. Li, Q.N. Li, L. Zhang, Di-1-methyl heptyl methylphosphonate (DMHMP): A promising extractant in Th-based fuel reprocessing, *Sep. Purif. Technol.* 173 (2017) 105-112.
- 14- M.L. Tan, C. Huang, S.D. Ding, F. Li, Q.N. Li, L. Zhang, C.X. Liu, S.M. Li, Highly efficient extraction separation of uranium(VI) and thorium(IV) from nitric acid solution with di(1-methyl-heptyl) methyl phosphonate, *Sep. Purif. Technol.* 146 (2015) 192-198.
- 15- T.P. Rao, P. Metilda, J.M. Gladis, Preconcentration techniques for uranium(VI) and thorium(IV) prior to analytical determination-an overview, *Talanta* 68 (2006) 1047-1064.
- 16- E.P. Horwitz, D.R. Mcallister, A.H. Bond, R.E. Barans, Novel Extraction of Chromatographic Resins Based on Tetraalkyldiglycolamides: Characterization and Potential Applications, *Solvent Extr. Ion. Exc.* 23 (2005) 319-344.
- 17- V.N. Epov, K. Benkhedda, R.J. Cornett, R.D. Evans, Rapid determination of plutonium in urine using flow injection on-line preconcentration and inductively coupled plasma mass spectrometry, *J. Anal. At Spectrom* 20 (2005) 424-430.
- 18- Metilda P, Sanghamitra K, Gladis JM, Naidu GRK, Rao TP (2005) Amberlite XAD-4 functionalized with succinic acid for the solid phase extractive preconcentration and separation of uranium(VI). *Talanta* 65:192–200

- 19- Donat R, Cılgı GK, Aytas S, Cetisl H (2009) Thermodynamics parameters and sorption of U(VI) on ACSD. Radioanal Nucl Chem 279:271-280
- 20- Merritt RC (1971) The extractive metallurgy of uranium. Colorado School of Mines Research Institute, Chicago.
- 21- Marczenko Z, Balcerzak M (2000) Separation, preconcentration and spectrophotometry in inorganic analysis. Elsevier Science B.V., Amsterdam, p 521.
- 22- Rohwer H, Rheeder N, Hosten E (1997) Interactions of uranium and thorium with arsenazoIII in an aqueous medium. Anal Chim Acta 341(2):263-268.
- 23- Davies W, Gray W (1964) A rapid and specific volumetric method for the precise determination of uranium using ferrous sulfate as a reductant". Talanta 11:1203-1211.
- 24- Mathew KJ, Mason B, Morales ME, Narayann UI (2009) Uranium assay determination using Davies and Gray titration: an overview and implementation of GUM uncertainty evaluation. Radio Anal Nucl Chem 282:939-944.
- 25- Puigdomenech I. HYDRA (hydrochemical equilibrium-constant database) and MEDUSA (make equilibrium diagrams using sophisticated algorithms) programs, Royal Institute of Technology, Sweden. <https://www.kth.se/en/che/medusa/downloads-1.386254>
- 26- Y.M.Khawassek, A.M.Masoud, M.H.Taha and A.E.M. Hussein (2018) Kinetics and thermodynamics of uranium ion adsorption from waste solution using Amberjet 1200 H as cation exchanger. J Radioanal Nucl Chem (2018). <https://doi.org/10.1007/s10967-017-5692-1>
- 27- Jamal Stas, Ajaj Dahdouh and habib Shlewit (2005) "Extraction of uranium (VI) from nitric acid And nitrate solutions By tributylphosphate/kerosene" periodica polytechnica ser. chem. eng. vol. 49, no. 1, pp. 3-18.
- 28- Haiduc, I., M. Curtui, I. Haiduc (1986) "Solvent extraction of uranium(vi) with di-2-ethylhexyldithiophosphoric acid from aqueous nitrate, chloride, sulfate and phosphate media" Journal of Radio analytical and Nuclear Chemistry, Articles, V. 99, No. 2, 257-263.
- 29- Merritt, R. C., The Extractive Metallurgy of Uranium, 1971, Colorado School of Mines Research Institute, USAEC, Johnson, Boulder, Co, 1971, p. 195.
- 30- O'Imez, S., and Eral, M., J. Biol. Trace Element Res., 1994, 43-45, 731

المخلص العربي

في هذه البحث تم عمل مراكز نشطة على سطح الراتنج ذات اختيارية لبعض العناصر وذلك بتحضير بعض الراتنجات العضوية المشبعة (المحملة) بمذيبات عضوية مختلفة عن طريق نقع راتنج حامل كدعامة بوليميرية في محلول المذيب العضوي (محلول التحميل) حتى يتشبع الراتنج. وتم تحميل الدعامة البوليميرية مثل البولي استير، الفحم النشط، باستخدام طريقة التحميل او التشبع الجاف عن طريق الامتزاز الفيزيائي على سطح الراتنج وتم دراسة العوامل المؤثرة على عملية التحميل. تم استخدام المذيبات عضوية ك (ثلاثي بيوتيل فوسفات ، داي -2- ايثيل هيدروكسيل حمض الفوسفوريك) وقد تم اختيار المذيبات عضوية التي تتمتع بخاصية الاستخلاص الاخياري لبعض العناصر طبقاً لنوع ودرجة المذيب المستخدم من حيث طول السلسلة والفروع الجانبية وكذلك ملائمتها للعمل في وسط النيتريك وتم دراسة العوامل المؤثرة على عملية امتزاز العناصر تحت الدراسة كما تم دراسة اعادة تنشيط الراتنج بهدف استرجاع العناصر وإعادة الاستخدام.